

SUNBRIGHT

PROFESSIONAL TOOLS

GEAR PULLER&SPECIALTY PULLER



- > SLIDING HAMMER SET
- > BEARING PULLER SET
- > GEAR PULLER

SLIDING HAMMER SET

ST165001 | PULLER FOR RIBBED DRIVE PULLER



DESCRIPTION:

Designed specifically for removal of stubborn ribbed crankshaft and auxiliary pulleys without the risk of damaging the pulley.

* Typically used on Peugeot HDi engines.

* Adjustable arms from 45 to 165 mm.

QTY	G.W.	N.W.	MEAS
10	16Kg	15Kg	24x21x22CM



ST165002 | 5 PCS INNER BEARING PULLER



DESCRIPTION:

The kit consists of a slide hammer (2 Lb-980 g) and a set of extractors of various sizes needed to pulling internal bearings.

* Capacity: 3/8 "(10mm) - 1-1 / 4" (32mm)

Contents:

- * Slide hammer - 980 g
- * Bearing extractor: 3/8 "to 1/2" (10 mm-14 mm)
- * Bearing extractor: 9/16 "to 11/16" (15mm-19mm)
- * Bearing extractor: 5/8 "to 1" (18mm-25mm)
- * Bearing extractor: 1 "to 1-1 / 4" (25mm-32mm)

QTY	G.W.	N.W.	MEAS
4	16.5Kg	15.5Kg	40x34x32CM



SLIDING HAMMER SET

ST165003 | 9 PCS BLIND HOLE BEARING PULLER SET



DESCRIPTION:
For car maintenance tasks requiring an internal puller, such as the removal of pilot bearings. This set is suitable for a wide range of vehicles and applications.

Specifications	
Shaft	Slide hammer shaft 390mm long
Hammer	2.15lb. (940g). 1000mm L.
Clamps	8~10mm (5/16"~13/32")
	10~12mm (13/32"~15/32")
	12~14mm (15/32"~9/16")
	15~17mm (19/32"~11/16")
	17~20mm (11/16"~25/32")
	20~24mm (25/32"~15/16")
	25~29mm (1"~1-1/8")
	30~32mm (1-3/16"~1-1/4")

QTY	G.W.	N.W.	MEAS
4	16.5Kg	15.5Kg	48x29x23CM

ST165004 | 10PCS BLIND HOLE PILOT BEARING PULLER



DESCRIPTION:
For removal of Pilot Bushes Bearings etc. form blind housings.
* One Slide hammer assemble 2.5 jaws.
* Threa:M10x1.5p, M10x1.5p. M8x1.25p,M10x1.5p M6x1.0p
5xClects (segment grip type);8-11mm, 12-17mm, 18-23mm, 24 29mm, 30-34mm,
* Screw adaptors M10x1.5p, M10x1.5p/M8x1.25p,M10x1. 5pM6x1.0p
* 1xCounter stay puller

QTY	G.W.	N.W.	MEAS
4	16.5Kg	15.5Kg	40x34x32CM



SLIDING HAMMER SET

ST165005 | 16 PCS BEARING EXTRACTOR SET



DESCRIPTION:
The bearing extractor set is used for the removal of pilot bush bearings.
Set includes:
* One Slide hammer assemble 2.5 jaws.
* Thread:M10x1.5p, M10x1.5p, M8x1.25p,M10x1.5p M6x1.0p
* 10 x Collects (segment grip type): 8-11mm, 12-17mm,18-23mm, 24-29mm,30-34mm,34-38mm, 39-43mm,44-48mm, 49-53mm 54-58mm
* Screw adaptors M10x1.5p, M10x1.5p/M8x1.25p,M10x1.5p/M6x1.0p
* 1 x Counter stay puller

QTY	G.W.	N.W.	MEAS
2	12Kg	11Kg	49x18x31CM




ST165006 | UNIVERSAL AXLES SLIDE HAMMER SET



DESCRIPTION:
* **Twin Leg Puller Specs:**
Internal capacity 35-110mm Reach 82mm
External Capacity: 50-140mm Reach 75mm Triple Leg Puller Specs
Internal capacity 50-135mm Reach 82mm
External Capacity: 20-135mm Reach 75mm
* **9-Way Vise:** external/internal three jaw puller, external/internal 2 jaw puller, grip wrench adapter, lip puller, hub puller, dent puller Includes dent puller, jaw puller, grip wrench, puller hood, and rear axle puller.

* **8-Way Vise:** external/internal three jaw puller, external/internal 2 jaw puller, grip wrench adapter, lip puller, hub puller, dent puller

QTY	G.W.	N.W.	MEAS
1	8Kg	7Kg	62.5x23x23CM

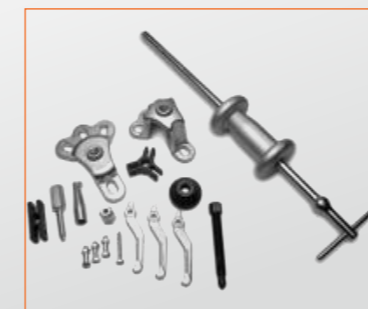

SLIDING HAMMER SET

ST165007 | 13PCS SLIDE HAMMER BODY REPAIR SET



DESCRIPTION:

Tool Sets includes:

- * 10lbs slide hammer - 22-3/4" length * Knurled handle
- * 90 degree 10mm puller * 90 degree 22mm puller
- * 135 degree 35mm Puller * 135 degree 65mm Puller
- * 70mm screw attachment puller (35mm screw) * 95mm narrowing tube Twin attachment
- * 190mm straight attachment * 70mm Hook attachment inc 440mm chain
- * Heavy duty blow case * Package including:
- * 1x slide hammer tool sets with case

QTY	G.W.	N.W.	MEAS
2	17Kg	16Kg	60x22x22CM

ST165008 | 3 JAW INTERNAL & EXTERNAL PULLER SET



DESCRIPTION:

Suitable for use where a shaft or other solid surface is not available for a thrust bolt or hydraulic ram to push against.

Size:

- * Small of internal puller 15mm to 30mm,
- * large of internal puller 30mm to 80mm,
- * external puller 15mm to 80mm.

QTY	G.W.	N.W.	MEAS
4	20Kg	19Kg	48x29x23CM



BEARING PULLER SET

ST165101 | SMALL INSERT BEARING PULLER



DESCRIPTION:

- Puller yoke with centre screw and twin arms 2 x leg extensions
- Centre screw thread cap
- 6 x ball ended threaded puller adaptors

QTY	G.W.	N.W.	MEAS
10	15Kg	14Kg	40x25x32CM

ST165102 | LARGE INSERT BEARING PULLER KIT



DESCRIPTION:

- Puller yoke with centre screw and twin arms 2 x leg extensions
- Centre screw thread cap
- 6 x ball ended threaded puller adaptors

QTY	G.W.	N.W.	MEAS
4	16Kg	15Kg	40x30x32CM

BEARING PULLER SET

ST165103 | 8 PCS UNIVERSAL PULLER SET



Universal Puller Set:

- * Material:Steel
- * 2Leg/ 3 Sizes
- * Variable Width
- * Chrome Molybdenum
- * Legs - 100 / 200 / 250mm Long

QTY	G.W.	N.W.	MEAS
2	11Kg	10Kg	40x17x32CM


ST165104 | 13 PCS UNIVERSAL PULLER SET



Universal Puller Set:

- * Material:Steel
- * 2-leg sliding bar
- * 3-leg sliding bar
- * arms 100 mm (3 pcs.)
- * arms 200 mm (3 pcs.)
- * arms 250 mm (3 pcs.)
- * fine thread spindle 160 mm
- * fine thread spindle 270 mm

QTY	G.W.	N.W.	MEAS
4	20Kg	19Kg	48x29x23CM

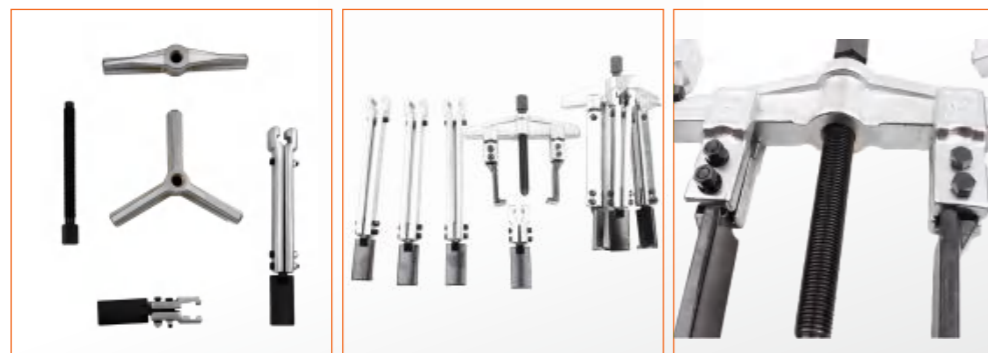

BEARING PULLER SET

ST165105 | BEARING SEPARATOR



DESCRIPTION:

- * Pull out the bearing with the H-type beam and bolts.
- * Bearing separator 30-50mm&50-75mm included.
- * Including 2 most popular bearing separator jaws(2" and 3" jaws).
- * Lead screw.
- * 5.6"Yoke Adapter.
- * 7.5"Extension screw,male and female threads,3/8"-16
- * 8.4"Extension screw,male and female threads,3/8"-16
- * 9.5"Extension screw,male threads,3/8"-16
- * 10.4"Extension screw,male threads,3/8"-16

QTY	G.W.	N.W.	MEAS
1	6Kg	11Kg	35x28x9CM



ST165106 | FRONT WHEEL BEARING PULLER FOR FORD TRANSIT



DESCRIPTION:

for removal of the front wheel bearing unit and for removing the wheel hub allows renewing of the camp without replacing the wheel hub consisting of:

- * puller with retaining key
- * screw set (5 pcs.)
- * pressure plate (large)
- * pressure plate (small)
- * spindle with hex. driv

QTY	G.W.	N.W.	MEAS



BEARING PULLER SET

ST165107 | COMPACT FRONT WHEEL HUB DRIVE BEARING PULLER REMOVAL TOOL



DESCRIPTION:

Suitable for: Audi A2, VW Polo, VW Fox, Seat Ibiza, Skoda Fabia

Bearing unit:

* 62 mm (2.4"), 66 mm (2.6"), 72 mm (2.8") in diameter

* 62 mm (2.4") used for VW Lupo & Audi A2

* 66 mm (2.6") used for VW Fox, VW Polo, Skoda Fabia

* 72 mm (2.8") used for VW Polo, Seat Ibiza, VW Fox with PAS, Audi A1, Audi A2, Seat Cordoba, Skoda Fabia, Skoda Roomster

QTY	G.W.	N.W.	MEAS
1	13Kg	12Kg	48x43x12CM

ST165108 | 14PCS GEAR PULLER AND BEARING SPLITTER SET



Set:

* 2PC bearing separator, size: 9/32"-3".

* 2PC bolts for bearing separator with nuts and washers: 5 -1/2"-thread.

* 2PC 6" pawls, 3/8"-16 thread with nuts.

* 4PC 6 -3/4" connecting bolts 3/8"-16 thread x5/16"-18 thread with nuts.

* 1PC 5 -1/2" push rod 9/16"-10 thread.

* 1PC bracket.

* 1PC cone head for push rod.

* 1PC flat head for push rod

QTY	G.W.	N.W.	MEAS
1	12Kg	19Kg	45x40x5CM



BEARING PULLER SET

ST165109 | 20PCS CAMSHAFT BEARING REMOVER INSTALLER




DESCRIPTION:

Universal use covering a wide range of cars with oil seals between 21.5mm and 64mm in diameter.

Use the existing bolt in the vehicle for installation.

Screw-type adapters to fit the centering.

The blue seal adapters are made of aluminum to prevent the damage of crank.



QTY	G.W.	N.W.	MEAS
1	3Kg	2Kg	47x19x6CM



ST165110 | 2 JAW BEARING PULLER



DESCRIPTION:

It is used to tear down ball bearing, gear and so on.

* The puller can be bilateral rotation.

* The point of the mandril through a special heat treatment process makes the product more solid and durable.

* Specilize in tearing down ball joint in parts of the combined mandrel brake system.

QTY	G.W.	N.W.	MEAS
40	20Kg	19Kg	40x35x20CM



BEARING PULLER SET

ST165111 | THREE-JAW PILOT BEARING PULLER



DESCRIPTION:
 The screw rod is durable after special heat treatment
 Humanized design, comfortable use, independent packaging,
 support factory inspection and various customization.
 Suitable for dismantling bearings, gears and so on in automotive
 and industrial industries.

QTY	G.W.	N.W.	MEAS
20	18Kg	17Kg	40x30x30CM

ST165112 | 3 JAW GEAR HUB BEARING PULLER



suitable for dismantling gears, pinions,bearings,pulleys

QTY	G.W.	N.W.	MEAS
20	18Kg	17Kg	40x30x30CM

GEAR PULLER

ST165201 | 10TON HYDRAULIC GEAR PULLER KIT



DESCRIPTION:
Contents:
 * 10 Ton Hydraulic Ram
 * Twin Head Adapter for using as a 2 jaw puller
 * Triple Head Adapter for using as a 3 jaw puller
 * Two-way Cross Beam
 * 3 x Gear Puller Legs/Jaws 100mm (4")
 * 3 x Gear Puller Legs/Jaws 150mm (6")
 * 3 x Gear Puller Legs/Jaws 200mm (8")
 * 2 x Main Rods
 * 2 x Extension Rods
 * Center Extension Adapters 20 - 35 - 85mm
 * Bearing Separator 75-105 mm

QTY	G.W.	N.W.	MEAS
5	22Kg	2Kg	45x28x30CM


ST165202 | TIMING GEAR PULLER 5 INCH



DESCRIPTION:
 Material: Carbon Steel
 Removes timing gears ,fan pullers, balancers and
 other automotive components with tapped holes.

QTY	G.W.	N.W.	MEAS
10	19Kg	18Kg	34x24x27CM

ST165203/ST165204 | 2 JAWS GEAR PULLER

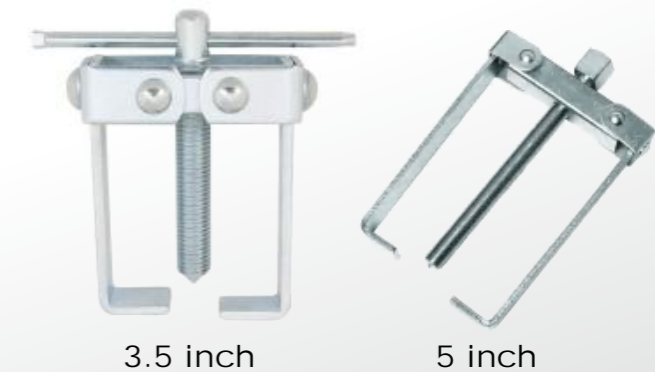

DESCRIPTION:
 Designed to remove gears up .
 Precision crafted for smooth operation.
 Heavy duty drop forged steel construction.
 3" Pull length, T-handle puller and beveled jaws.

QTY	G.W.	N.W.	MEAS
6	18Kg	17Kg	41x21x34CM

QTY	G.W.	N.W.	MEAS
6	14.5Kg	13.5Kg	31x25x40CM